# ACTEC

### **DDAS**

## **DALI Dimmer**


DALI 调光器

#### **Features:**

- Compatible with DALI control system or stand alone use with DALI drivers
- Dimming range 1...100%
- Built in on/off and rotary knob dimming control
- Protections: Over-voltage, overload
- Memory function for dimming level
- Smooth dimming compatible with DALI control gears
- Stand-by power: < 0.5W
- Set single address, group address, scene address or broadcast address via dip switch



- 适用DALI调光系统
- 调光范围1...100%
- 带开关旋钮调光功能
- 过压过载保护功能
- 记忆功能
- 平滑调光,效果完美
- 待机功耗:<0.5W
- 通过拨码开关选择单地址、组地址、场景地址和广播地址

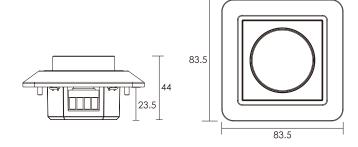


#### **Parameters:**

Model No.	Dimming Mode	ECG Max. control	Input voltage	Output current	Load wattage	Ambient temperature	Dimensions LxWxH	Weight
型 등	调光方式	最多接入数	额定电压 (V)	输出电流 (mA)	负载功率 (W)	环境温度 ta(℃)	尺寸 ( mm )	重量 (g)
DDAS	DALI	26	220V-240V	52	0.9	0+40 °C	83.5x83.5x44	120

#### Method 1: A single DALI group configuration

The DALI dimmer can control On/Off and dimming for a group of DALI drivers without DALI controller and DALI PS (Set DIP to broadcast)



#### Method 2: A typical DALI configuration

The dimmer can be set to Group 1 or 2 through the DIP so as to control G1 or G2  $\,$ 

